





Providing Superior Cathodic Protection for Underground Tanks

Galvotec Magnesium H-1 Soil Anodes

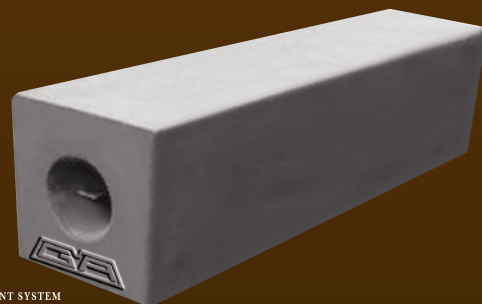

QUALITY MANAGEMENT SYSTEM
CERTIFIED BY DNV
ISO 9001:2000

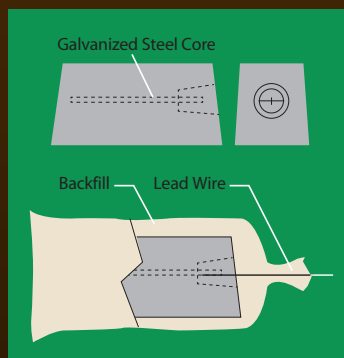

Packaged Anodes are prepackaged in a cardboard carton in low resistivity, quick wetting prepared backfill consisting of 75% hydrated gypsum, 20% bentonite, and 5% sodium sulfate.

Connecting Wire: Standard 10 feet of solid or stranded #12 AWG Copper Lead Wire/THWN/THNN.

NOTE: While statements contained herein are believed to be accurate, they are offered as suggestions only and no warranty or representation is intended.

Alloy Composition	
	Grade H-1 A ASTM B843-AZ63B
Element	%
Aluminum	5.3 - 6.7
Zinc	2.5 - 3.5
Manganese (Mn)	0.15 - 0.7
Impurities	
Iron (Max)	0.003
Nickel (Max)	0.002
Copper (Max)	0.02
Silicon (Max)	0.10
Other (Max)	0.30
Magnesium	Balance